

*The standard for  
UV spectroscopy*

## Synapse<sup>®</sup> 1024 × 256 Front-Illuminated CCD Detector

The exceptional quantum efficiency of the HORIBA Scientific Front-Illuminated 1024 × 256 CCD makes this detector ideal for extremely low-level signals in a variety of applications. Its 26 μm × 26 μm pixel size offers a high full well capacity, a large dynamic range and an excellent signal-to-noise ratio. The height of this chip makes it the best choice for multitracking measurements or full 6.7 mm binning in the UV to near-IR spectral regions for an increased signal-to-noise ratio.



ELEMENTAL ANALYSIS

FLUORESCENCE

GRATINGS &  
OEM SPECTROMETERS

OPTICAL COMPONENTS

PARTICLE CHARACTERIZATION

RAMAN

SPECTROSCOPIC ELLIPSOMETRY

SPR IMAGING

### Feature

### Spectroscopy Benefits


Deep Thermoelectric Cooling	Low dark signal with no need for liquid nitrogen
Lifetime Vacuum Warranty	All-metal sealed technology allows a permanent vacuum, letting us offer a lifetime warranty
Excellent Linearity	Increased accuracy of data over the full dynamic range
USB 2.0 Interface	Standard connection to PC notebooks and desktops with 100% data integrity
Auxiliary Signal Input	Unique ability to add measurements from single-channel detectors without additional electronics
UV-enhanced Coating	UV response down to 200 nm
Scientific Grade 1 CCD	Ideally suited for low light level detection in a variety of spectroscopic applications
HORIBA Scientific's SynerJY <sup>®</sup> Software	Complete control of a Synapse CCD and HORIBA Scientific Spectrograph system with full analysis capabilities
LabVIEW VIs and SDK Available	Flexible software to integrate a Synapse CCD into existing apparatus or as an OEM component



## Specifications\*

CCD Format		1024 × 256, front-illuminated, UV-coated, Scientific Grade 1		
Pixel Size		26 μm × 26 μm		
Image Area		26.6 mm × 6.7 mm, 100% fill factor		
Cooling System		Four-stage thermoelectric cooling. Typical operating temperature −80°C, guaranteed to −75°C. External cooling option available (−95°C typical).		
		Minimum	Typical	Maximum
Readout Noise	20 kHz		3.4 e <sup>−</sup> rms	5 e <sup>−</sup> rms
	1 MHz		15 e <sup>−</sup> rms	20 e <sup>−</sup> rms
Pixel Well Capacity		350 ke <sup>−</sup>	500 ke <sup>−</sup>	
Register Well Capacity			1000 ke <sup>−</sup>	
Dark Current			0.002 e <sup>−</sup> /pixel/s	
Nonlinearity		< 0.4% at 20 kHz < 1% at 1 MHz		
Scan Rates		20 kHz and 1 MHz, software-selectable		
Software-Selectable Gains		3 software-selectable gains		
Dynamic Range		16 bits		
Vertical Shift Rates		36 μs, 9 μs		
Maximum Spectral Rate	20 kHz	13 Hz		
	1 MHz	278 Hz		

\*Specifications subject to change without notice.

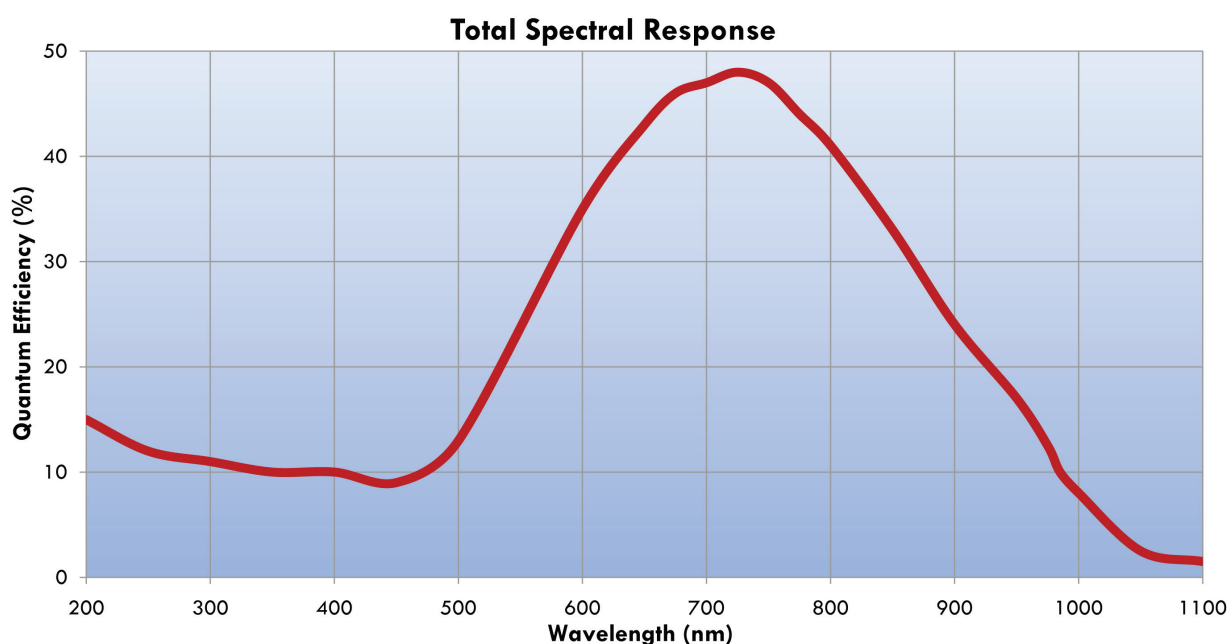

# HORIBA

## Scientific

### Ordering Information:

#### CCD-1024x256-FIUV-SYN Synapse Thermoelectric Cooled CCD System

Our CCD packages include a CCD shutter for clean CCD charge transfer and background subtraction.

ELEMENTAL ANALYSIS

FLUORESCENCE

GRATINGS &  
OEM SPECTROMETERS

OPTICAL COMPONENTS




PARTICLE CHARACTERIZATION

RAMAN

SPECTROSCOPIC ELLIPSOMETRY

SPR IMAGING

## Mechanical Dimensions

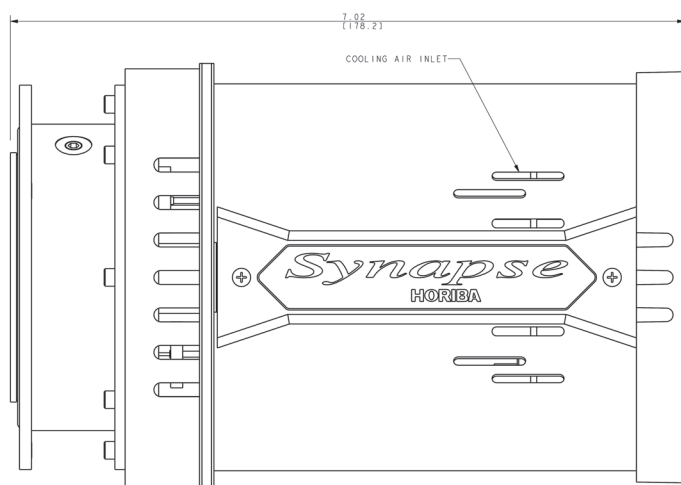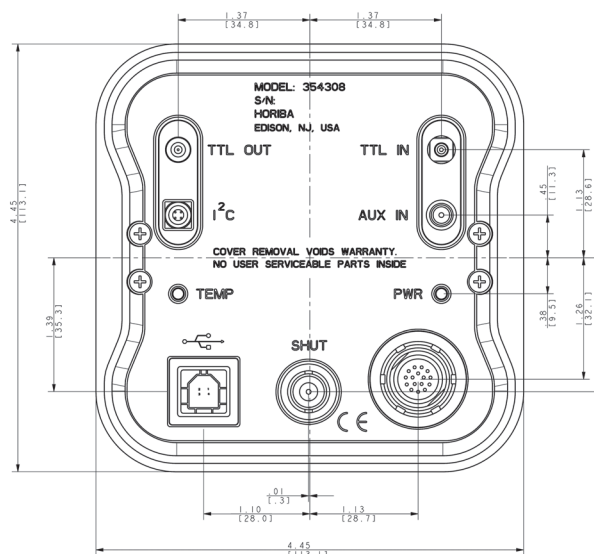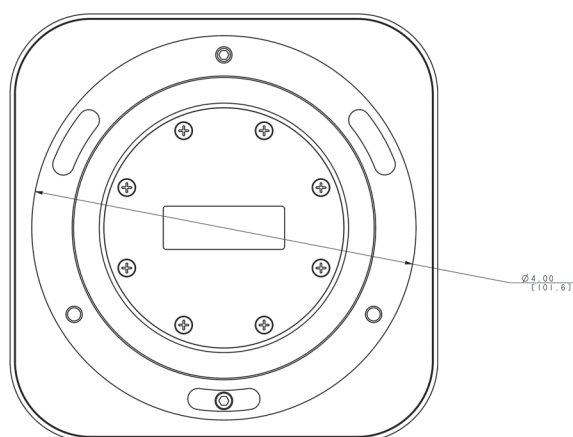

[info-sci@horiba.com](mailto:info-sci@horiba.com)  
[www.horiba.com/scientific](http://www.horiba.com/scientific)

**HORIBA**  
Scientific

**USA:** +1 732 494 8660  
**UK:** +44 (0)20 8204 8142  
**Spain:** +34 91 490 23 34  
**Other Countries:** +33 (0)1 64 54 13 00

**France:** +33 (0)1 64 54 13 00  
**Italy:** +39 0 2 5760 3050  
**China:** +86 (0)10 8567 9966

**Germany:** +49 (0)89 4623 17-0  
**Japan:** +81 (0)3 3861 8231  
**Brazil:** +55 11 5545 1540



This document is not contractually binding under any circumstances. P/N: OSD-0059 SYN rev. G © HORIBA Instruments Incorporated 09/2012