

The best quantum efficiency for low-intensity UV-VIS spectroscopic signals

Synapse® 1024 × 256 Back-Illuminated UV-Sensitive CCD Detector

The exceptional quantum efficiency of the HORIBA Scientific Back-Illuminated UV-Sensitive 1024 × 256 CCD makes this detector ideal for acquisition of extremely low-level signals in the UV and visible wavelengths. This detector is better-suited for emission spectroscopy where peaks are narrow.



Feature

Spectroscopy Benefits

Deep Thermoelectric Cooling	Low dark signal with no need for liquid nitrogen
Lifetime Vacuum Warranty	All-metal sealed technology allows a permanent vacuum, letting us offer a lifetime warranty
Excellent Linearity	Increased accuracy of data over the full dynamic range
USB 2.0 Interface	Standard connection to PC notebooks and desktops with 100% data integrity
Auxiliary Signal Input	Unique ability to add measurements from single-channel detectors without additional electronics
Back-Illuminated CCD with UV-Enhanced Coating	Highest quantum efficiency for greatest sensitivity with enhanced UV response
Scientific Grade 1 CCD	Ideally suited for low light level detection in a variety of spectroscopic applications
HORIBA Scientific's SynerJY® Software	Complete control of a Synapse CCD and HORIBA Scientific Spectrograph system with full analysis capabilities
LabVIEW VIs and SDK Available	Flexible software to integrate a Synapse CCD into existing apparatus or as an OEM component




Specifications*

CCD Format		1024 × 256, back-illuminated, UV-coated, Scientific Grade 1		
Pixel Size		26 μm × 26 μm		
Image Area		26.6 mm × 6.7 mm, 100% fill factor		
Cooling System		Four-stage thermoelectric cooling. Typical operating temperature −80°C, guaranteed to −75°C. External cooling option available (−95°C typical).		
		Minimum	Typical	Maximum
Readout Noise	20 kHz		5 e [−] rms	8 e [−] rms
	1 MHz		20 e [−] rms	25 e [−] rms
Pixel Well Capacity		350 ke [−]	500 ke [−]	
Register Well Capacity			1000 ke [−]	
Dark Current			0.004 e [−] /pixel/s	
Nonlinearity		< 0.4% at 20 kHz < 1% at 1 MHz		
Scan Rates		20 kHz and 1 MHz, software-selectable		
Software-Selectable Gains		3 software-selectable gains		
Dynamic Range		16 bits		
Vertical Shift Rates		36 μs, 9 μs		
Maximum Spectral Rate	20 kHz	13 Hz		
	1 MHz	278 Hz		

*Specifications subject to change without notice.

Typical Spectral Response

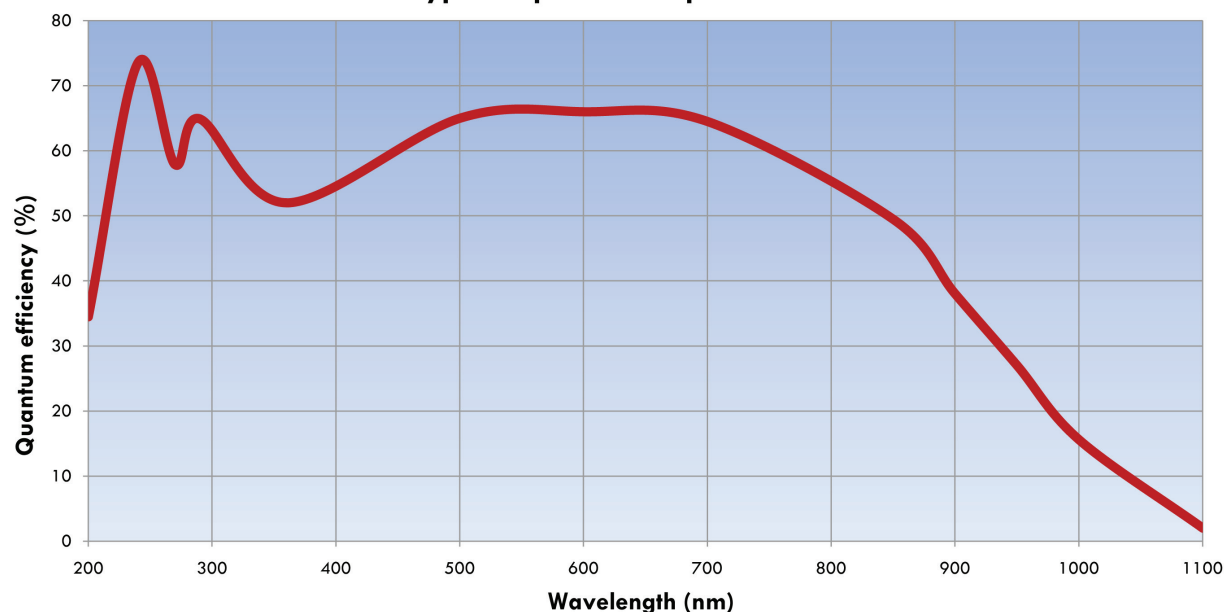

HORIBA

Scientific

Ordering Information:

CCD-1024x256-BIUV-SYN Synapse Thermoelectric Cooled CCD System

Our CCD packages include a CCD shutter for clean CCD charge transfer and background subtraction.

ELEMENTAL ANALYSIS

FLUORESCENCE

GRATINGS &
OEM SPECTROMETERS

OPTICAL COMPONENTS




PARTICLE CHARACTERIZATION

RAMAN

SPECTROSCOPIC ELLIPSOMETRY

SPR IMAGING

Mechanical Dimensions

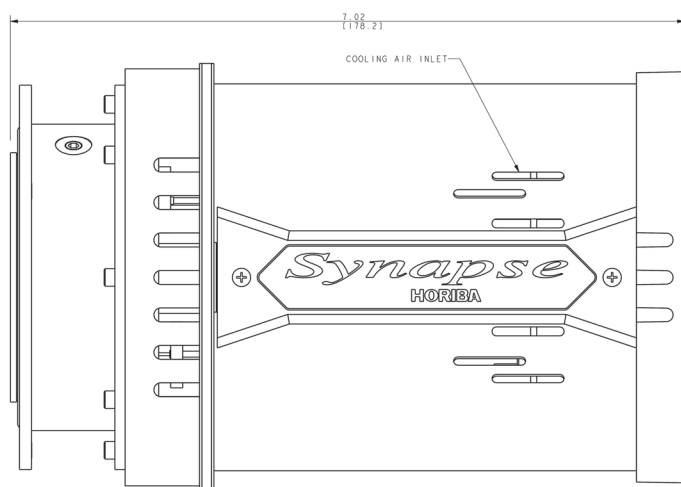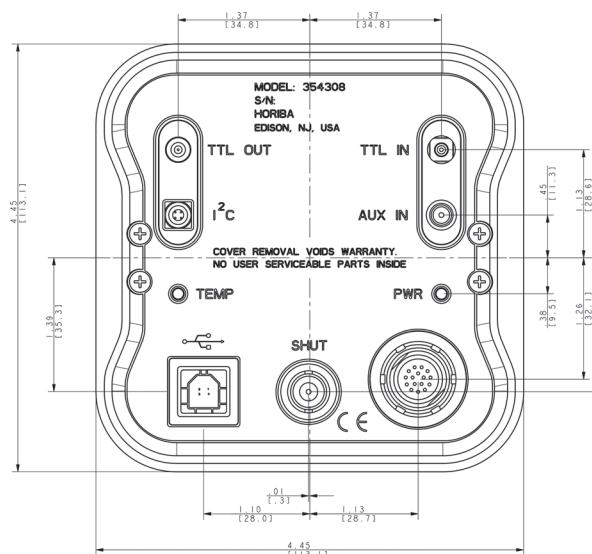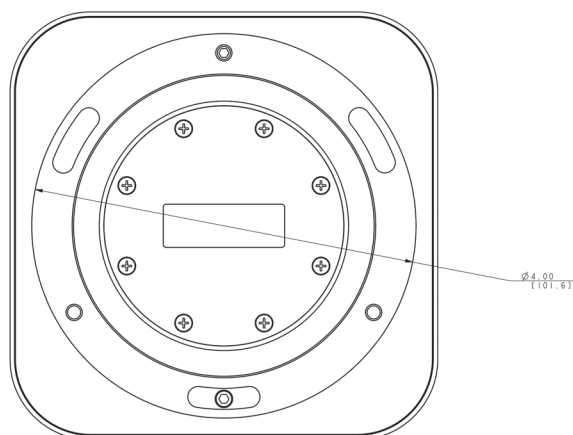

info-sci@horiba.com
www.horiba.com/scientific

HORIBA
Scientific

USA: +1 732 494 8660
UK: +44 (0)20 8204 8142
Spain: +34 91 490 23 34
Other Countries: +33 (0)1 64 54 13 00

France: +33 (0)1 64 54 13 00
Italy: +39 0 2 5760 3050
China: +86 (0)10 8567 9966

Germany: +49 (0)89 4623 17-0
Japan: +81 (0)3 3861 8231
Brazil: +55 11 5545 1540



This document is not contractually binding under any circumstances. P/N: OSD-0061 SYN rev. G © HORIBA Instruments Incorporated 09/2012